


NMP 19 – Materials for severe operating conditions including added-value functionalities

- micro- and macro-electrochemical methods
- environmental tests with varying humidity, temperature and UV-ray intensity
- self-healing sol-gel coatings

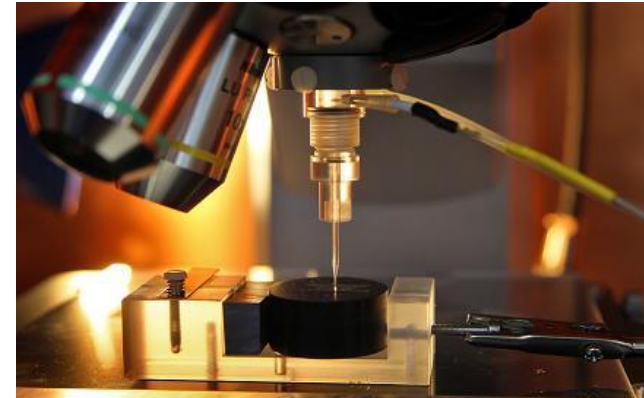

microcorrosion cell

References:

- [1] Hockauf, M., Meyer, L.W., Nickel, D., Alisch, G., Lampke, T., Wielage, B., Krüger, L. “Mechanical properties and corrosion behaviour of ultrafine-grained AA6082 produced by equal-channel angular pressing”, Journal of Materials Science **2008** 23–24, p. 7409–7417
<http://dx.doi.org/10.1007/s10853-008-2724-9>
- [2] Nickel, D., Alisch, G., Podlesak, H., Hockauf, M., Fritsche, G., Lampke, T. „Microstructure, corrosion and wear behavior of UFG-powder-metallurgical Al-Cu alloys, Al-Cu/Al₂O₃(p) and Al-Cu/SiC(p) composites“ Reviews on Advanced Materials Science, **2010**, p. 261–269 http://www.ipme.ru/e-journals/RAMS/no_32510/nickel.html
- [3] Lampke, Th.; Darwich, S.; Wielage, B.; Steinhäuser, S. „Cost-efficient conversion coatings for corrosion protection prepared by the sol-gel process” Mat.-wiss. u. Werkstofftech. **2008**, 39, p. 460–465.
<http://dx.doi.org/10.1002/mawe.200800277>

Chemnitz University of Technology
Surface Technology and
Functional Materials Group
09107 Chemnitz
http://www.tu-chemnitz.de/mb/OTF/index_en.php



Univ.-Prof. Dr.-Ing. habil.
Thomas Lampke

Phone: +49 (0)371 531 – 36163
Email: HORIZON@mb.tu-chemnitz.de